



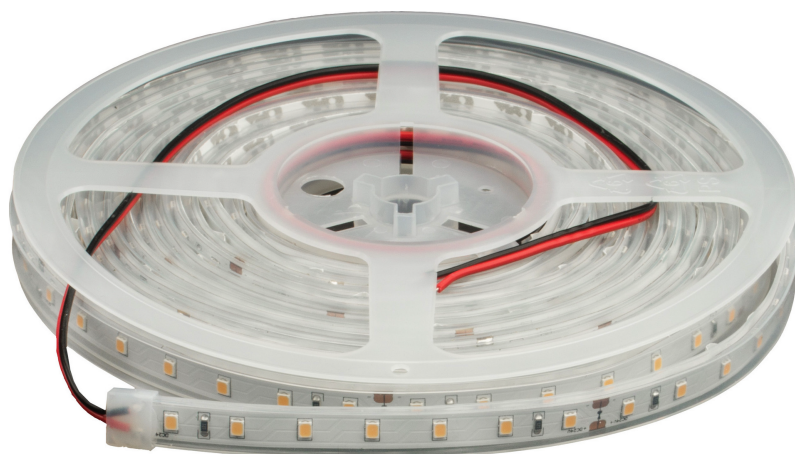

STRIPCENTURY 24 IP67




Colour	Power/m	Length	Width	IP	Input	lm/m	LED/m	Cuttable Length	CRI	*A	ARTICLE CODE
2700K	4,8W/m	5m	8mm	IP67	DC 24V	530	70	100 mm	>80	15mm	AA80102.00.90
3000K	4,8W/m	5m	8mm	IP67	DC 24V	590	70	100 mm	>80	15mm	AA80102.00.91
4000K	4,8W/m	5m	8mm	IP67	DC 24V	640	70	100 mm	>80	15mm	AA80102.00.92
2700K	9,6W/m	5m	8mm	IP67	DC 24V	1050	140	50 mm	>80	7mm	AA80103.00.90
3000K	9,6W/m	5m	8mm	IP67	DC 24V	1170	140	50 mm	>80	7mm	AA80103.00.91
4000K	9,6W/m	5m	8mm	IP67	DC 24V	1260	140	50 mm	>80	7mm	AA80103.00.92
2700K	14,4W/m	5m	10mm	IP67	DC 24V	1580	210	33,3mm	>80	4mm	AA80104.00.90
3000K	14,4W/m	5m	10mm	IP67	DC 24V	1740	210	33,3mm	>80	4mm	AA80104.00.91
4000K	14,4W/m	5m	10mm	IP67	DC 24V	1880	210	33,3mm	>80	4mm	AA80104.00.92

* Incl. 3M tape on the reverse side, silicon casing, cable length 350mm

* Control gear to be ordered separately

* It is advised to use LEDstrips in combination with an aluminium profile



Kleurweergave - Rendu des couleurs	CRI >80
LB waarde - Valeur LB	LB 90B10
Branduren - Durée de vie	54000h
Garantie - Garantie	5 jaar - 5 ans
Efficiëntie - Efficacité	123 - 131 Lumen/W
Dimbaar - Dimmable	met PWM dimmer - avec PWM dimmeur
Extra - Extra	RoHS gekeurd - RoHS certifié

